

UL20712 Multi FEP Cable

产品描述

产品名称：多芯 FEP 电缆
 型号：AWM20712
 尺寸：2*18~7*14AWG

产品性能

额定电压：600V
 额定温度：150℃

产品结构

导体：镀锡丝，镀镍丝
 绝缘：FEP
 填充：FEP 绝缘玻纤绳
 捆绑：涤纶纱
 外护：FEP

Description

Name: Multi FEP Wire
 Model:AWM 20712
 Size:2*18~7*14AWG


Feature

Rated Voltage:600V
 Rated Temperature:150℃

Structure

Conductor: Tinned Copper,Nickel Plated Copper
 Insulation:FEP
 Filler:Fiberglass With FEP insulated
 Binding:Polyester Yarn
 Jacket:FEP

Model

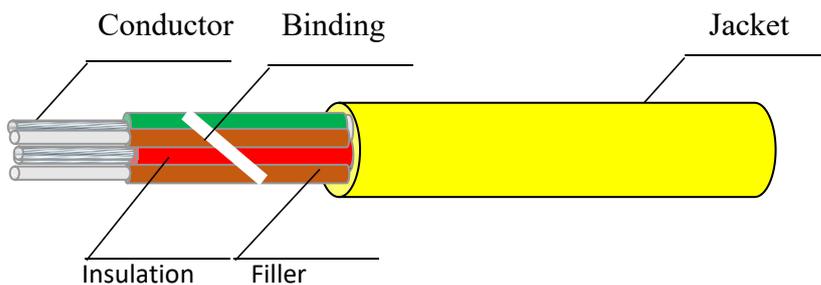

| Size (AWG) | Conductor Structure (mm) | Diameter (mm) | Insulation Thickness (mm) | Diameter (mm) | Cabling Diameter | Jacket Thickness (mm) | O.D. (mm) |
|------------|--------------------------|---------------|---------------------------|---------------|------------------|-----------------------|-----------|
| 2*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 3.40 | 0.31 | 4.0±0.2 |
| 3*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 3.70 | 0.31 | 4.3±0.2 |
| 4*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 4.10 | 0.31 | 4.7±0.3 |
| 5*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 4.60 | 0.31 | 5.2±0.3 |
| 6*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 4.80 | 0.31 | 5.5±0.3 |
| 7*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 5.10 | 0.31 | 5.7±0.3 |
| 2*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 4.00 | 0.31 | 4.6±0.2 |
| 3*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 4.30 | 0.31 | 4.9±0.2 |
| 4*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 4.80 | 0.31 | 5.4±0.3 |
| 5*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 5.40 | 0.31 | 6.0±0.3 |
| 6*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 5.60 | 0.31 | 6.2±0.3 |
| 7*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 6.00 | 0.31 | 6.6±0.3 |
| 2*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 4.80 | 0.31 | 5.4±0.3 |
| 3*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 5.20 | 0.31 | 5.7±0.3 |
| 4*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 5.80 | 0.31 | 6.4±0.3 |
| 5*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 6.50 | 0.31 | 7.1±0.4 |
| 6*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 6.70 | 0.31 | 7.3±0.4 |
| 7*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 7.20 | 0.31 | 7.8±0.4 |

UL20712 Multi FEP Cable

产品描述

产品名称：多芯 FEP 电缆

型号：AWM20712

尺寸：2*18~7*14AWG

产品性能

额定电压：600V

额定温度：150℃

产品结构

导体：镀锡丝，镀镍丝

绝缘：FEP

填充：FEP 绝缘玻纤绳

捆绑：涤纶纱

屏蔽：镀锡丝，镀镍丝

外护：FEP

Description

Name: Multi FEP Wire

Model:AWM 20712

Size:2*18~7*14AWG

Feature

Rated Voltage:600V

Rated Temperature:150℃

Structure

Conductor: Tinned Copper,Nickel Plated Copper

Insulation:FEP


Filler:Fiberglass With FEP insulated

Binding:Polyester Yarn

Shield:Tinned Copper,Nickel Plated Copper

Jacket:FEP

Model

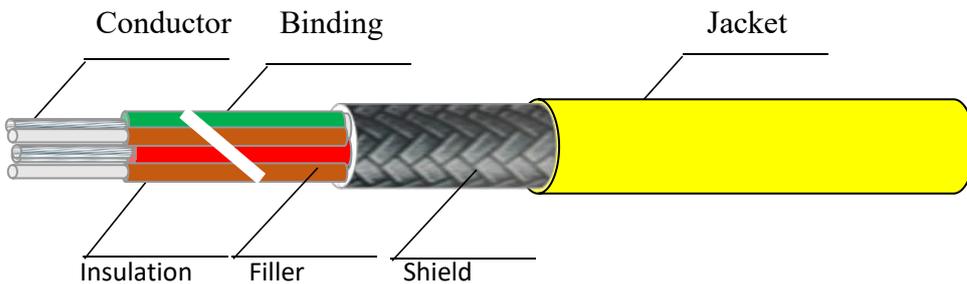

| Size (AWG) | Conductor Structure (mm) | Diameter (mm) | Insulation Thickness (mm) | Diameter (mm) | Cabling Diameter | Shield Thickness (mm) | Jacket Thickness (mm) | O.D. (mm) |
|------------|--------------------------|---------------|---------------------------|---------------|------------------|-----------------------|-----------------------|-----------|
| 2*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 3.40 | 0.2 | 0.31 | 4.2±0.2 |
| 3*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 3.70 | 0.2 | 0.31 | 4.5±0.2 |
| 4*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 4.10 | 0.2 | 0.31 | 4.9±0.3 |
| 5*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 4.60 | 0.2 | 0.31 | 5.4±0.3 |
| 6*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 4.80 | 0.2 | 0.31 | 5.7±0.3 |
| 7*18 | 7/0.39 | 1.17 | 0.25 | 1.70 | 5.10 | 0.2 | 0.31 | 5.9±0.3 |
| 2*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 4.00 | 0.2 | 0.31 | 4.8±0.2 |
| 3*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 4.30 | 0.2 | 0.31 | 5.1±0.2 |
| 4*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 4.80 | 0.2 | 0.31 | 5.6±0.3 |
| 5*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 5.40 | 0.2 | 0.31 | 6.2±0.3 |
| 6*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 5.60 | 0.2 | 0.31 | 6.4±0.3 |
| 7*16 | 19/0.3 | 1.50 | 0.25 | 2.00 | 6.00 | 0.2 | 0.31 | 6.8±0.3 |
| 2*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 4.80 | 0.2 | 0.31 | 5.6±0.3 |
| 3*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 5.20 | 0.2 | 0.31 | 5.8±0.3 |
| 4*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 5.80 | 0.2 | 0.31 | 6.6±0.3 |
| 5*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 6.50 | 0.2 | 0.31 | 7.3±0.4 |
| 6*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 6.70 | 0.2 | 0.31 | 7.5±0.4 |
| 7*14 | 19/0.37 | 1.85 | 0.25 | 2.40 | 7.20 | 0.2 | 0.31 | 8.0±0.4 |