

# PEEK Wire

## 产品描述

名称: PEEK 线  
 型号: AK-250  
 尺寸: 24~10AWG

## 产品性能

额定电压: 300V  
 额定温度: -60°C~+250°C

## 产品结构

导体: 镀镍丝, 镀银丝  
 绝缘: 聚醚醚酮  
 颜色: 待定

## Description


Name: PEEK Wire  
 Model: AK-250  
 Size: 24~10AWG

## Feature

Ratings Voltage: 300V  
 Rated temperature: -60°C~+250°C

## Structure

Conductor: Stranded Nickel Plated Copper, Silver Plated Copper  
 Insulation: PEEK  
 Color: TBD

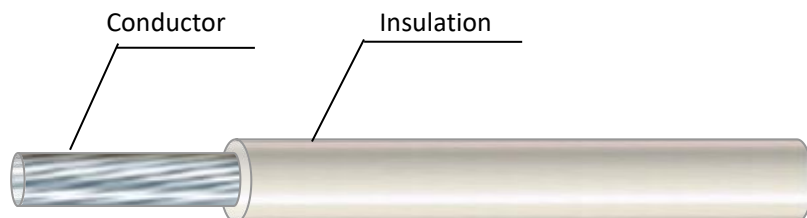

Size AWG	Conductor Structure	Diameter (mm)	Insulation Thickness (mm)	Diameter (mm)
24	7/0.2	0.6	0.1	0.8±0.1
22	7/0.254	0.76	0.1	1.0±0.1
20	7/0.32	0.96	0.1	1.2±0.1
18	7/0.39	1.17	0.1	1.4±0.1
16	19/0.3	1.50	0.2	1.9±0.1
14	19/0.38	1.90	0.2	2.3±0.1
12	19/0.48	2.40	0.2	2.8±0.2
10	37/0.43	3.01	0.25	3.5±0.2

# PEEK Wire

## 产品描述

名称: PEEK 线  
 型号: AK-250  
 尺寸: 24~10AWG

## 产品性能

额定电压: 600V  
 额定温度: -60°C~+250°C

## 产品结构

导体: 镀镍丝, 镀银丝  
 绝缘: 聚醚醚酮  
 颜色: 待定

## Description


Name: PEEK Wire  
 Model: AK-250  
 Size: 24~10AWG

## Feature

Ratings Voltage: 600V  
 Rated temperature: -60°C~+250°C

## Structure

Conductor: Stranded Nickel Plated Copper, Silver Plated Copper  
 Insulation: PEEK  
 Color: TBD

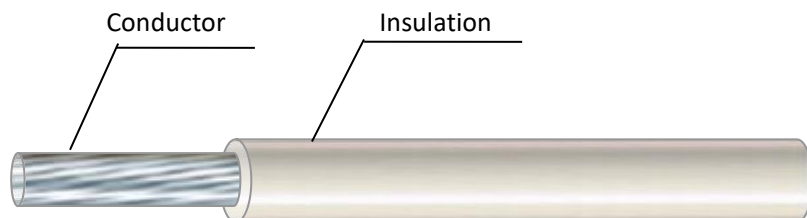

Size AWG	Conductor Structure	Diameter (mm)	Insulation Thickness (mm)	Diameter (mm)
24	7/0.2	0.6	0.15	0.9±0.1
22	7/0.254	0.76	0.15	1.1±0.1
20	7/0.32	0.96	0.15	1.3±0.1
18	7/0.39	1.17	0.15	1.5±0.1
16	19/0.3	1.50	0.25	2.0±0.1
14	19/0.38	1.90	0.25	2.4±0.1
12	19/0.48	2.40	0.25	2.9±0.2
10	37/0.43	3.01	0.3	3.6±0.2