

Polyimide Insulated Wire

产品描述

名称：聚酰亚胺绝缘线
尺寸：24~10AWG

产品性能

额定电压：300V
额定温度：-60°C~+250°C

产品结构

导体：镀镍丝,镀银丝
绝缘：聚酰亚胺
颜色：待定

Description


Name: Polyimide Insulated Wire
Size: 24~10AWG

Feature

Ratings Voltage: 300V
Rated temperature: -60°C~+250°C

Structure

Conductor: Stranded Nickel Plated Copper, Silver Plated Copper
Insulation: Extruded Polyimide
Color: TBD

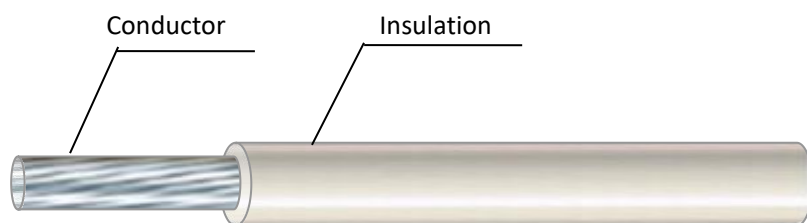

Size AWG	Conductor Structure	Diameter (mm)	Insulation Thickness (mm)	Diameter (mm)
24	7/0.2	0.6	0.1	0.8±0.1
22	7/0.254	0.76	0.1	1.0±0.1
20	7/0.32	0.96	0.1	1.2±0.1
18	7/0.39	1.17	0.1	1.4±0.1
16	19/0.3	1.50	0.2	1.9±0.1
14	19/0.38	1.90	0.2	2.3±0.1
12	19/0.48	2.40	0.2	2.8±0.2
10	37/0.43	3.01	0.25	3.5±0.2

Polyimide Insulated Wire

产品描述

名称：聚酰亚胺绝缘线

尺寸：24~10AWG

产品性能

额定电压：600V

额定温度：-60°C~+250°C

产品结构

导体：镀镍丝,镀银丝

绝缘：聚酰亚胺

颜色：待定

Description

Name: Polyimide Insulated Wire

Size: 24~10AWG

Feature

Ratings Voltage: 600V


Rated temperature: -60°C~+250°C

Structure

Conductor: Stranded Nickel Plated Copper, Silver Plated Copper

Insulation: Extruded Polyimide

Color: TBD

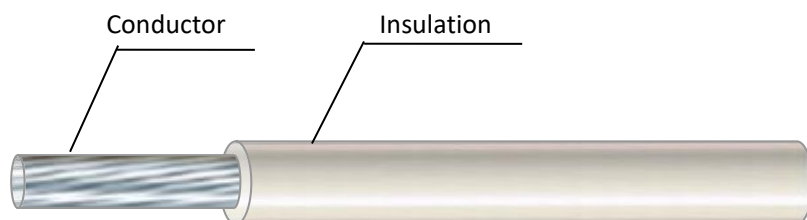

Size AWG	Conductor Structure	Diameter (mm)	Insulation Thickness (mm)	Diameter (mm)
24	7/0.2	0.6	0.15	0.9±0.1
22	7/0.254	0.76	0.15	1.1±0.1
20	7/0.32	0.96	0.15	1.3±0.1
18	7/0.39	1.17	0.15	1.5±0.1
16	19/0.3	1.50	0.25	2.0±0.1
14	19/0.38	1.90	0.25	2.4±0.1
12	19/0.48	2.40	0.25	2.9±0.2
10	37/0.43	3.01	0.3	3.6±0.2