

UL20604 Multi FEP Cable

产品描述

产品名称：多芯 FEP 电缆
 型号：AWM20604
 尺寸：2*18~7*14AWG

Description

Name: Multi FEP Wire
 Model:AWM 20604
 Size:2*18~7*14AWG

产品性能

额定电压：300V
 额定温度：200℃

Feature

Rated Voltage:300V
 Rated Temperature:200℃


产品结构

导体：镀锡丝，镀镍丝
 绝缘：FEP
 填充：FEP 绝缘玻纤绳
 捆绑：涤纶纱
 外护：FEP

Structure

Conductor: Tinned Copper,Nickel Plated Copper
 Insulation:FEP
 Filler:Fiberglass With FEP insulated
 Binding:Polyester Yarn
 Jacket:FEP

Model

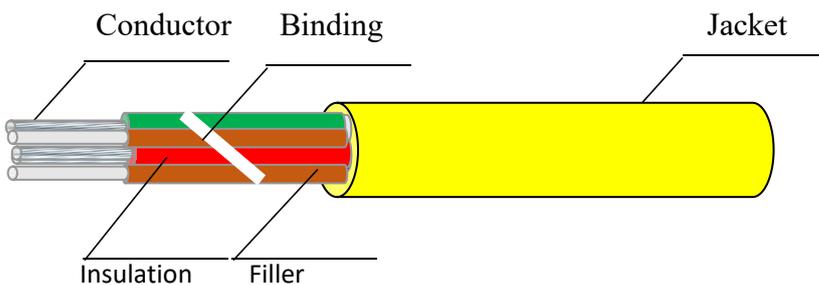

Size (AWG)	Conductor Structure (mm)	Diameter (mm)	Insulation Thickness (mm)	Diameter (mm)	Cabling Diameter	Jacket Thickness (mm)	O.D. (mm)
2*18	7/0.39	1.17	0.25	1.70	3.40	0.28	4.0±0.2
3*18	7/0.39	1.17	0.25	1.70	3.70	0.28	4.3±0.2
4*18	7/0.39	1.17	0.25	1.70	4.10	0.28	4.7±0.3
5*18	7/0.39	1.17	0.25	1.70	4.60	0.28	5.2±0.3
6*18	7/0.39	1.17	0.25	1.70	4.80	0.28	5.4±0.3
7*18	7/0.39	1.17	0.25	1.70	5.10	0.28	5.7±0.3
2*16	19/0.3	1.50	0.25	2.00	4.00	0.28	4.6±0.2
3*16	19/0.3	1.50	0.25	2.00	4.30	0.28	4.9±0.2
4*16	19/0.3	1.50	0.25	2.00	4.80	0.28	5.4±0.3
5*16	19/0.3	1.50	0.25	2.00	5.40	0.28	6.0±0.3
6*16	19/0.3	1.50	0.25	2.00	5.60	0.28	6.2±0.3
7*16	19/0.3	1.50	0.25	2.00	6.00	0.28	6.6±0.3
2*14	19/0.37	1.85	0.25	2.40	4.80	0.28	5.4±0.3
3*14	19/0.37	1.85	0.25	2.40	5.20	0.28	5.8±0.3
4*14	19/0.37	1.85	0.25	2.40	5.80	0.28	6.4±0.3
5*14	19/0.37	1.85	0.25	2.40	6.50	0.28	7.2±0.4
6*14	19/0.37	1.85	0.25	2.40	6.70	0.28	7.3±0.4
7*14	19/0.37	1.85	0.25	2.40	7.20	0.28	7.8±0.4

UL20604 Multi FEP Cable

产品描述

产品名称：多芯 FEP 电缆

型号：AWM20604

尺寸：2*18~7*14AWG

产品性能

额定电压：300V

额定温度：200℃

产品结构

导体：镀锡丝，镀镍丝

绝缘：FEP

填充：FEP 绝缘玻纤绳

捆绑：涤纶纱

屏蔽：镀锡丝，镀镍丝

外护：FEP

Description

Name: Multi FEP Wire

Model:AWM20604

Size:2*18~7*14AWG

Feature

Rated Voltage:300V

Rated Temperature:200℃

Structure

Conductor: Tinned Copper,Nickel Plated Copper

Insulation:FEP


Filler:Fiberglass With FEP insulated

Binding:Polyester Yarn

Shield:Tinned Copper,Nickel Plated Copper

Jacket:FEP

Model

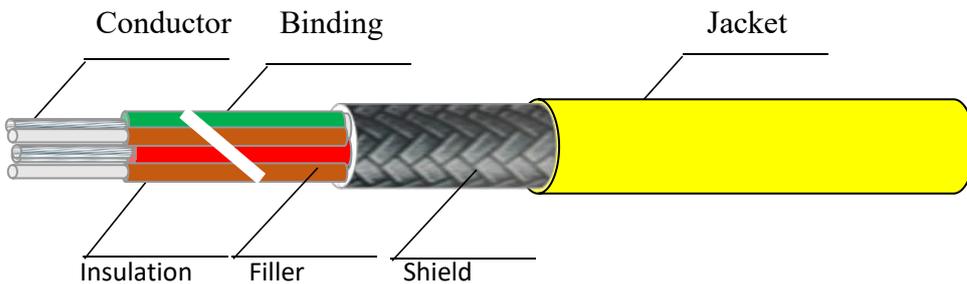

Size (AWG)	Conductor Structure (mm)	Diameter (mm)	Insulation Thickness (mm)	Diameter (mm)	Cabling Diameter	Shield Thickness (mm)	Jacket Thickness (mm)	O.D. (mm)
2*18	7/0.39	1.17	0.25	1.70	3.40	0.2	0.28	4.2±0.2
3*18	7/0.39	1.17	0.25	1.70	3.70	0.2	0.28	4.5±0.2
4*18	7/0.39	1.17	0.25	1.70	4.10	0.2	0.28	4.9±0.3
5*18	7/0.39	1.17	0.25	1.70	4.60	0.2	0.28	5.4±0.3
6*18	7/0.39	1.17	0.25	1.70	4.80	0.2	0.28	5.6±0.3
7*18	7/0.39	1.17	0.25	1.70	5.10	0.2	0.28	5.9±0.3
2*16	19/0.3	1.50	0.25	2.00	4.00	0.2	0.28	4.8±0.2
3*16	19/0.3	1.50	0.25	2.00	4.30	0.2	0.28	5.0±0.2
4*16	19/0.3	1.50	0.25	2.00	4.80	0.2	0.28	5.7±0.3
5*16	19/0.3	1.50	0.25	2.00	5.40	0.2	0.28	6.2±0.3
6*16	19/0.3	1.50	0.25	2.00	5.60	0.2	0.28	6.4±0.3
7*16	19/0.3	1.50	0.25	2.00	6.00	0.2	0.28	6.8±0.3
2*14	19/0.37	1.85	0.25	2.40	4.80	0.2	0.28	5.6±0.3
3*14	19/0.37	1.85	0.25	2.40	5.20	0.2	0.28	6.0±0.3
4*14	19/0.37	1.85	0.25	2.40	5.80	0.2	0.28	6.6±0.3
5*14	19/0.37	1.85	0.25	2.40	6.50	0.2	0.28	7.4±0.4
6*14	19/0.37	1.85	0.25	2.40	6.70	0.2	0.28	7.5±0.4
7*14	19/0.37	1.85	0.25	2.40	7.20	0.2	0.28	8.0±0.4